

#### **Technical data**

г.,	ncti		ı	-+-
ΗП	Incti	ona	ın	ата

Valve Size	1.5" [40]		
Fluid	chilled or hot water, up to 60% glycol		
Fluid Temp Range (water)	0250°F [-18120°C]		
Body Pressure Rating	400 psi		
Close-off pressure Δps	200 psi		
Flow characteristic	equal percentage		
Servicing	maintenance-free		
Flow Pattern	2-way		
Leakage rate	0% for A – AB		
Controllable flow range	75°		
Cv	37		
Body pressure rating note	400 psi		
No Characterized Disc	TRUE		
Cv Flow Rating	A-port: as stated in chart B-port: 70% of A – AB Cv		
Valve body	Nickel-plated brass body		
Stem seal	EPDM (lubricated)		
Seat	PTFE		
Pipe connection	NPT female ends		
O-ring	EPDM (lubricated)		
Ball	stainless steel		
Non-Spring	ARB(X) NRQB(X)		

## Safety notes



**Suitable actuators** 

Materials

 WARNING: This product can expose you to lead which is known to the State of California to cause cancer and reproductive harm. For more information go to www.p65warnings.ca.gov


## **Product features**


## **Application**

This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV box re-heat coils and bypass loops. This valve is suitable for use in a hydronic system with variable flow.




#### Flow/Mounting details







## **Dimensions**

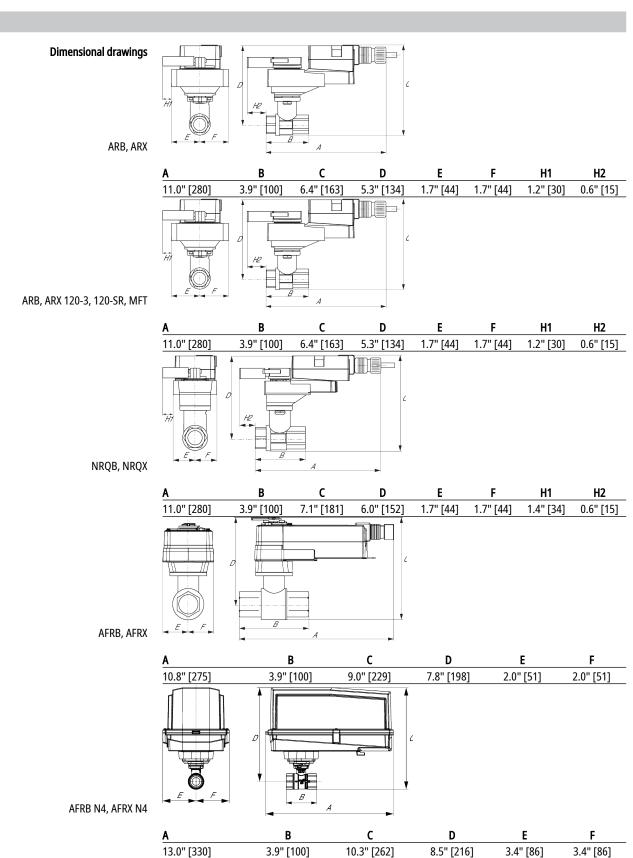






ARB N4, ARX N4, NRB N4, NRX N4

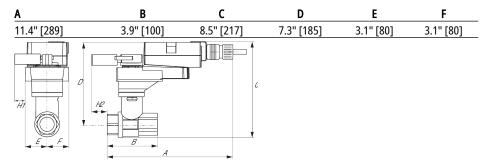

NRQB, NRQX

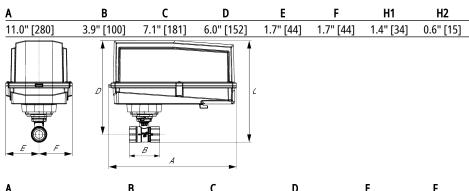

AFRB N4, AFRX N4

Α	В	C	D	E	F
13.0" [330]	3.9" [100]	10.3" [262]	8.5" [216]	3.4" [86]	3.4" [86]



Modulating, Non-Spring Return, AC 100...240 V, for DC 2...10 V or 4...20 mA







Fechnical data			
Electrical data	Nominal voltage	AC 100240 V	
	Nominal voltage frequency	50/60 Hz	
	Power consumption in operation	4 W	
	Power consumption in rest position	1 W	
	Transformer sizing	7.5 VA (class 2 power source)	
	Electrical Connection	18 GA appliance cable, 3ft [1m] 10ft [3m] and 16f [5m], with 1/2" conduit connector, degree of protection NEMA 2 / IP54	
	Overload Protection	electronic thoughout 090° rotation	
Functional data	Operating range Y	210 V	
	Operating range Y note	420 mA w/ ZG-R01 (500 $\Omega$ , 1/4 W resistor)	
	Input Impedance	100 k $\Omega$ for 210 V (0.1 mA), 500 $\Omega$ for 420 mA	
	Position feedback U	210 V	
	Direction of motion motor	selectable with switch 0/1	
	Manual override	external push button	
	Angle of rotation	90°	
	Angle of rotation note	adjustable with mechanical stop	
	Running Time (Motor)	default 90 s, variable 90 or 150 s	
	Running time motor variable	90 or 150 s	
	Noise level, motor	45 dB(A)	
	Position indication	Mechanically, pluggable	
Safety data	Degree of protection IEC/EN	IP54	
	Degree of protection NEMA/UL	NEMA 2 UL Enclosure Type 2	
	Agency Listing	cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE acc. to 2014/30/EU and 2014/35/EU; Listed to UL 2043 - suitable for use in air plenums per Section 300.22(c) of the NEC and Section 602.2 of the IMC	
	Quality Standard	ISO 9001	
	Ambient temperature	-22122°F [-3050°C]	
	Storage temperature	-40176°F [-4080°C]	
	Ambient humidity	max. 95% r.H., non-condensing	
	Servicing	maintenance-free	
Weigh	: Weight	2.2 lb [1.0 kg]	

# Safety notes

Technical data sheet ARX120-SR



- NEMA 4X, 316L stainless steel enclosure.
- Battery Back Up System for SY(7~10)-110
- ZS-300 without brackets.
- Terminal-strip cover for NEMA 2 rating (-T models).
- MFT95 resistor kit for 4 to 20 mA control applications.
- Battery Back Up System for SY(10~12)-220P

#### **Electrical installation**

# > INSTALLATION NOTES

(A) Actuators with appliance cables are numbered.

Provide overload protection and disconnect as required.

Actuators may be connected in parallel. Power consumption and input impedance must be observed.


Only connect common to negative (-) leg of control circuits.

 $\chi$  A 500  $\Omega$  resistor (ZG-R01) converts the 4...20 mA control signal to 2...10 V.

Meets cULus requirements without the need of an electrical ground connection.

#### Warning! Live Electrical Components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.



2...10 V / 4...20 mA Control AC 100...240 V