







### Technical data

| Functional data    | Valve Size                | 0.5" [15]   |
|--------------------|---------------------------|---|
|                    | Fluid                     | chilled or hot water, up to 60% glycol                                    |
|                    | Fluid Temp Range (water)  | 0250°F [-18120°C]   |
|                    | Body Pressure Rating      | 600 psi   |
|                    | Body pressure rating note | 600 psi   |
|                    | Close-off pressure ∆ps    | 200 psi   |
|                    | Flow characteristic       | A-port equal percentage, B-port modified for<br>constant common port flow |
|                    | Servicing                 | maintenance-free  |
|                    | Flow Pattern              | 3-way Mixing/Diverting  |
|                    | Leakage rate              | 0% for A – AB, <2.0% for B – AB   |
|                    | Controllable flow range   | 75°   |
|                    | Cv                        | 1.9   |
|                    | Cv Flow Rating            | A-port: as stated in chart B-port: 70% of A – AB<br>Cv                    |
| Materials          | Valve body                | Nickel-plated brass body  |
|                    | Stem                      | stainless steel   |
|                    | Stem seal                 | EPDM (lubricated)   |
|                    | Seat                      | PTFE  |
|                    | Characterizing disk       | TEFZEL®   |
|                    | Pipe connection           | NPT female ends   |
|                    | O-ring                    | EPDM (lubricated)   |
|                    | Ball                      | stainless steel   |
| Suitable actuators | Non-Spring                | TR<br>LRB(X)<br>NRB(X) N4   |
|                    | Spring                    | TFB(X)<br>LF  |

# Safety notes




• WARNING: This product can expose you to lead which is known to the State of California to cause cancer and reproductive harm. For more information go to www.p65warnings.ca.gov




### **Product features**

**Application** This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV box reheat coils and bypass loops. This valve is suitable for use in a hydronic system with variable or constant flow.

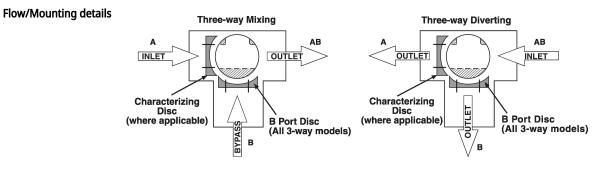


#### Dimensions

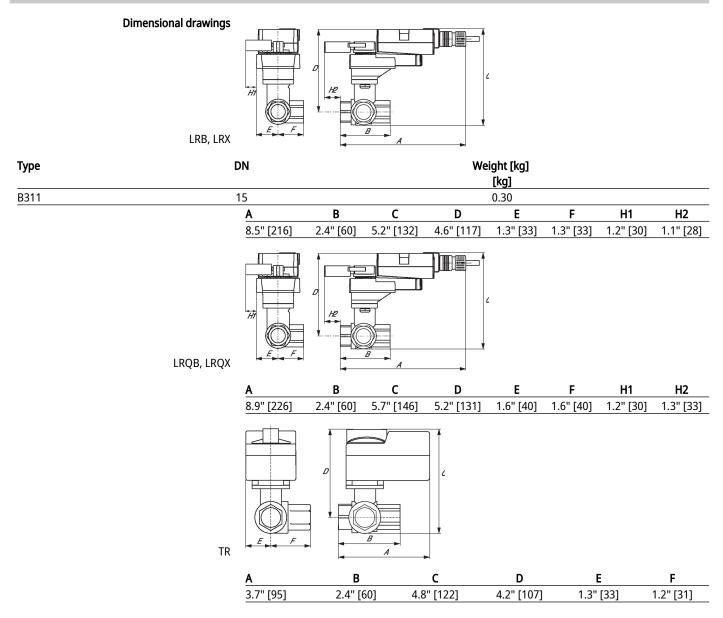





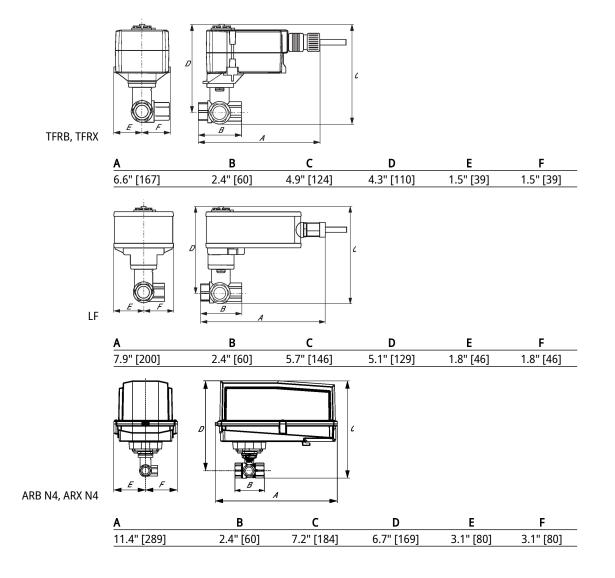



# **Technical data sheet**

# LRX24-SR-T

Modulating, Non-Spring Return, 24 V, for DC 2...10 V or 4...20 mA





# **Technical data**

| Electrical data | Nominal voltage                    | AC/DC 24 V   |
|-----------------|------------------------------------|--|
|                 | Nominal voltage frequency          | 50/60 Hz   |
|                 | Power consumption in operation     | 1.5 W  |
|                 | Power consumption in rest position | 0.2 W  |
|                 | Transformer sizing                 | 3 VA (class 2 power source)  |
|                 | Electrical Connection              | Screw terminal (for 26 to 14 GA wire)  |
|                 | Overload Protection                | electronic thoughout 090° rotation   |
| Functional data | Operating range Y                  | 210 V  |
|                 | Operating range Y note             | 420 mA w/ ZG-R01 (500 Ω, 1/4 W resistor)   |
|                 | Input Impedance                    | 100 k $\Omega$ for 210 V (0.1 mA), 500 $\Omega$ for 420 mA   |
|                 | Position feedback U                | 210 V  |
|                 | Position feedback U note           | Max. 1 mA  |
|                 | Direction of motion motor          | selectable with switch 0/1   |
|                 | Manual override                    | external push button   |
|                 | Angle of rotation                  | 90°  |
|                 | Angle of rotation note             | adjustable with mechanical stop  |
|                 | Running Time (Motor)               | 90 s   |
|                 | Noise level, motor                 | 35 dB(A)   |
|                 | Position indication                | Mechanically, pluggable  |
| Safety data     | Degree of protection IEC/EN        | IP54   |
|                 | Degree of protection NEMA/UL       | NEMA 2   |
|                 | Enclosure                          | UL Enclosure Type 2  |
|                 | Agency Listing                     | cULus acc. to UL60730-1A/-2-14, CAN/CSA<br>E60730-1:02, CE acc. to 2014/30/EU<br>Listed to UL 2043 - suitable for use in air<br>plenums per Section 300.22(C) of the NEC and<br>Section 602 of the IMC |
|                 | Quality Standard                   | ISO 9001   |
|                 | Ambient temperature                | -22122°F [-3050°C]   |
|                 | Storage temperature                | -40176°F [-4080°C]   |
|                 | Ambient humidity                   | Max. 95% RH, non-condensing  |
|                 | Servicing                          | maintenance-free   |
| Weight          | Weight                             | 1.1 lb [0.50 kg]   |



| Electrical accessories       Description       Type         Battery backup system, for non-spring return models       NSV24 US         Battery, 12 V, 1.2 Ah (two required)       NSV-BAT         Auxiliary switch 1 x SPDT add-on       SIA         Auxiliary switch 2 x SPDT add-on, grey       P140A GR         Feedback potentiometer 140 Ω add-on, grey       P1000A GR         Feedback potentiometer 10 kΩ add-on, grey       P10000A GR         Feedback potentiometer 10 kΩ add-on, grey       P10000A GR         Feedback potentiometer 500 Ω add-on, grey       P5000A GR         Feedback potentiometer 500 Ω add-on, grey       P5000A GR         Feedback potentiometer 5 kΩ add-on, grey       P5000A GR         Peedback potentiometer 5 kΩ add-on, grey       P5000A GR         Provide overload protection and disconnect as required.       Actuators may be connected in parallel. Power consumption and input impedance must be observed.         Actuators may also be powered by DC 24 V.       Only connect common to negative (-) leg of control circuits.         Only on presistor (76.P01) converts the 4_20 mA control signal to 2_10 V       Only control signal to 2_10 V  | Accessories                             |  |            |  |  |  |  |
|--|---|--|------------|--|--|--|--|
| Battery, 12 V, 1.2 Ah (two required)       NSV-BAT         Auxiliary switch 1 x SPDT add-on       S1A         Auxiliary switch 2 x SPDT add-on       S2A         Feedback potentiometer 140 Ω add-on, grey       P140A GR         Feedback potentiometer 1 kΩ add-on, grey       P1000A GR         Feedback potentiometer 10 kΩ add-on, grey       P1000A GR         Feedback potentiometer 2.8 kΩ add-on, grey       P2800A GR         Feedback potentiometer 500 Ω add-on, grey       P500A GR         Feedback potentiometer 5 kΩ add-on, grey       P5000A GR         Actuators may be connected in parallel. Power consumption and input impedance must be observed.       Actuators may also be powered by DC 24 V.         Only connect common to negative (-) leg of control circuits.       Only connect common to negative (-) leg of control circuits. <th>Electrical accessories</th> <th>Description</th> <th>Туре</th> | Electrical accessories                  | Description  | Туре       |  |  |  |  |
| Auxiliary switch 1 x SPDT add-on       S1A         Auxiliary switch 2 x SPDT add-on       S2A         Feedback potentiometer 140 Ω add-on, grey       P140A GR         Feedback potentiometer 1 kΩ add-on, grey       P1000A GR         Feedback potentiometer 10 kΩ add-on, grey       P1000A GR         Feedback potentiometer 10 kΩ add-on, grey       P2800A GR         Feedback potentiometer 500 Ω add-on, grey       P500A GR         Feedback potentiometer 5 kΩ add-on, grey       P500A GR         Feedback potentiometer 5 kΩ add-on, grey       P5000A GR         Provide overload protection and disconnect as required.       Actuators may be connected in parallel. Power consumption and input impedance must be observed.         Actuators may also be powered by DC 24 V.       Only connect common to negative (-) leg of control circuits.   |   | Battery backup system, for non-spring return models                                    | NSV24 US   |  |  |  |  |
| Auxiliary switch 2 x SPDT add-on       S2A         Feedback potentiometer 140 Ω add-on, grey       P140A GR         Feedback potentiometer 1 kΩ add-on, grey       P1000A GR         Feedback potentiometer 10 kΩ add-on, grey       P10000A GR         Feedback potentiometer 2.8 kΩ add-on, grey       P2800A GR         Feedback potentiometer 500 Ω add-on, grey       P5000A GR         Feedback potentiometer 5 kΩ add-on, grey       P5000A GR         Feedback potentiometer 5 kΩ add-on, grey       P5000A GR         Feedback potentiometer 5 kΩ add-on, grey       P5000A GR         Provide overload protection and disconnect as required.       Actuators may be connected in parallel. Power consumption and input impedance must be observed.         Actuators may also be powered by DC 24 V.       Only connect common to negative (-) leg of control circuits.   |   | Battery, 12 V, 1.2 Ah (two required)   | NSV-BAT    |  |  |  |  |
| Feedback potentiometer 140 Ω add-on, grey       P140A GR         Feedback potentiometer 1 kΩ add-on, grey       P1000A GR         Feedback potentiometer 10 kΩ add-on, grey       P10000A GR         Feedback potentiometer 2.8 kΩ add-on, grey       P2800A GR         Feedback potentiometer 500 Ω add-on, grey       P5000A GR         Feedback potentiometer 5 kΩ add-on, grey       P5000A GR         Feedback potentiometer 5 kΩ add-on, grey       P5000A GR         Feedback potentiometer 5 kΩ add-on, grey       P5000A GR         Forvide overload protection and disconnect as required.       Actuators may be connected in parallel. Power consumption and input impedance must be observed.         Actuators may also be powered by DC 24 V.       Only connect common to negative (-) leg of control circuits.  |   | Auxiliary switch 1 x SPDT add-on   | S1A        |  |  |  |  |
| Feedback potentiometer 1 kΩ add-on, grey       P1000A GR         Feedback potentiometer 10 kΩ add-on, grey       P10000A GR         Feedback potentiometer 2.8 kΩ add-on, grey       P2800A GR         Feedback potentiometer 500 Ω add-on, grey       P500A GR         Feedback potentiometer 5 kΩ add-on, grey       P5000A GR         Feedback potentiometer 5 kΩ add-on, grey       P5000A GR         Electrical installation       Feedback potentiometer 5 kΩ add-on, grey         Feedback potentiometer 5 kΩ add-on, grey       P5000A GR         Feedback potentiometer 5 kΩ add-on, grey       P500A GR         Feedback potentiometer 5 kΩ       Feedback potentiometer 5 kΩ         Actuators may be connected in parallel. Power consumption and input impedance must be observed.       Actuators may also be powered by DC 24 V.         Only   |   | Auxiliary switch 2 x SPDT add-on   | S2A        |  |  |  |  |
| Feedback potentiometer 10 kΩ add-on, grey       P10000A GR         Feedback potentiometer 2.8 kΩ add-on, grey       P2800A GR         Feedback potentiometer 500 Ω add-on, grey       P500A GR         Feedback potentiometer 5 kΩ add-on, grey       P5000A GR         Feedback potentiometer 5 kΩ add-on, grey       P500A GR         Feedback potenti   |   | Feedback potentiometer 140 $\Omega$ add-on, grey                                       | P140A GR   |  |  |  |  |
| Feedback potentiometer 2.8 kΩ add-on, grey       P2800A GR         Feedback potentiometer 500 Ω add-on, grey       P500A GR         Feedback potentiometer 5 kΩ add-on, grey       P5000A GR         Electrical installation       ****         INSTALLATION NOTES       Actuators may be connected in parallel. Power consumption and input impedance must be observed.         Actuators may also be powered by DC 24 V.       Only connect common to negative (-) leg of control circuits.  |   | Feedback potentiometer 1 k $\Omega$ add-on, grey                                       | P1000A GR  |  |  |  |  |
| Feedback potentiometer 500 Ω add-on, grey       P500A GR         Feedback potentiometer 5 kΩ add-on, grey       P5000A GR         Electrical installation       INSTALLATION NOTES         Actuators may be connected in parallel. Power consumption and input impedance must be observed.       Actuators may also be powered by DC 24 V.         Only connect common to negative (-) leg of control circuits.       Only connect common to negative (-) leg of control circuits.   |   | Feedback potentiometer 10 k $\Omega$ add-on, grey                                      | P10000A GR |  |  |  |  |
| Feedback potentiometer 5 kΩ add-on, grey       P5000A GR         Electrical installation       INSTALLATION NOTES         Actuators may be connected in parallel. Power consumption and input impedance must be observed.       Actuators may also be powered by DC 24 V.         Only connect common to negative (-) leg of control circuits.       Only connect common to negative (-) leg of control circuits.  |   | Feedback potentiometer 2.8 k $\Omega$ add-on, grey                                     | P2800A GR  |  |  |  |  |
| Electrical installation  |   | Feedback potentiometer 500 $\Omega$ add-on, grey                                       | P500A GR   |  |  |  |  |
| <ul> <li>INSTALLATION NOTES</li> <li>Provide overload protection and disconnect as required.</li> <li>Actuators may be connected in parallel. Power consumption and input impedance must be observed.</li> <li>Actuators may also be powered by DC 24 V.</li> <li>Only connect common to negative (-) leg of control circuits.</li> </ul>  |   | Feedback potentiometer 5 k $\Omega$ add-on, grey                                       | P5000A GR  |  |  |  |  |
| <ul> <li>Actuators may be connected in parallel. Power consumption and input impedance must be observed.</li> <li>Actuators may also be powered by DC 24 V.</li> <li>Only connect common to negative (-) leg of control circuits.</li> </ul>   | Electrical installation                 |  |            |  |  |  |  |
| <ul> <li>Actuators may be connected in parallel. Power consumption and input impedance must be observed.</li> <li>Actuators may also be powered by DC 24 V.</li> <li>Only connect common to negative (-) leg of control circuits.</li> </ul>   | ~                                       | SINSTALLATION NOTES  |            |  |  |  |  |
| <ul> <li>Actuators may be connected in parallel. Power consumption and input impedance must be observed.</li> <li>Actuators may also be powered by DC 24 V.</li> <li>Only connect common to negative (-) leg of control circuits.</li> </ul>   | -                                       |  |            |  |  |  |  |
| observed.<br>Actuators may also be powered by DC 24 V.<br>Only connect common to negative (-) leg of control circuits.   | - A                                     |  |            |  |  |  |  |
| S Only connect common to negative (-) leg of control circuits.   | Σ=                                      |  |            |  |  |  |  |
| Only connect common to negative (-) leg of control circuits.   | Â                                       | Actuators may also be powered by DC 24 V.  |            |  |  |  |  |
|  |   |  |            |  |  |  |  |
|  | , i i i i i i i i i i i i i i i i i i i | $\Lambda$ A 500 $\Omega$ resistor (ZG-R01) converts the 420 mA control signal to 210 V |            |  |  |  |  |


- Actuators are provided with a numbered screw terminal strip instead of a cable.
  - Meets cULus requirements without the need of an electrical ground connection.

# Marning! Live electrical components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

#### Wiring diagrams

#### 2...10 V / 4...20 mA Control

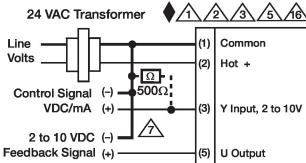

#### Installation notes

## Dimensions

Servicing