


**Average temperature sensor**

Active sensor (4...20 mA) for measuring the averaging temperature in duct applications. IP65 / NEMA 4X rated enclosure. Supplied with one continuous sensing element across the whole length of the probe to ensure optimum accuracy and eliminate air stratification problems.

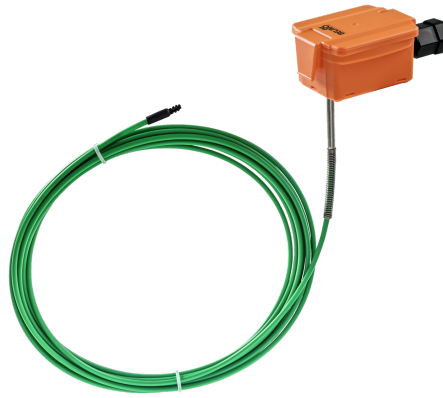

5-year warranty


**Type Overview**

Type	Output signal active temperature	Probe Length
22MT-544	4...20 mA	10 ft [3 m]
22MT-545	4...20 mA	20 ft [6 m]
22MT-548	4...20 mA	50 ft [15 m]

**Technical data**

<b>Electrical Data</b>	Nominal voltage	DC 24 V																																				
	Nominal voltage range	DC 15...35 V																																				
	Power consumption DC	0.5 W																																				
	Electrical connection	Pluggable spring-loaded terminal block max. 2.5 mm <sup>2</sup>																																				
	Cable entry	Cable gland with strain relief ø6...8 mm (1/2" NPT conduit connector included)																																				
<b>Functional Data</b>	Medium	Air																																				
	Multirange	8 measuring ranges selectable																																				
	Current output	1x 4...20 mA, max. resistance 500 Ω																																				
<b>Measuring Data</b>	Measured values	Temperature																																				
<b>Specification temperature active</b>	Sensing element technology	Based on Pt1000 class AA																																				
	Measuring range temperature settings	Active sensor: range selectable Attention: The maximum measuring range listed does not indicate the allowable fluid temperature for the sensor. Refer to safety data for the maximum fluid temperature limits.																																				
		<table border="1"> <thead> <tr> <th>Setting</th> <th>Range [°C]</th> <th>Range [°F]</th> <th>Factory setting</th> </tr> </thead> <tbody> <tr> <td>S0</td> <td>-50...50</td> <td>-30...130</td> <td></td> </tr> <tr> <td>S1</td> <td>-10...120</td> <td>0...250</td> <td></td> </tr> <tr> <td>S2</td> <td>0...50</td> <td>40...140</td> <td></td> </tr> <tr> <td>S3</td> <td>0...250</td> <td>30...480</td> <td></td> </tr> <tr> <td>S4</td> <td>-15...35</td> <td>0...100</td> <td></td> </tr> <tr> <td>S5</td> <td>0...100</td> <td>40...240</td> <td></td> </tr> <tr> <td>S6</td> <td>-20...80</td> <td>40...90</td> <td>✓</td> </tr> <tr> <td>S7</td> <td>0...160</td> <td>0...150</td> <td></td> </tr> </tbody> </table>	Setting	Range [°C]	Range [°F]	Factory setting	S0	-50...50	-30...130		S1	-10...120	0...250		S2	0...50	40...140		S3	0...250	30...480		S4	-15...35	0...100		S5	0...100	40...240		S6	-20...80	40...90	✓	S7	0...160	0...150	
Setting	Range [°C]	Range [°F]	Factory setting																																			
S0	-50...50	-30...130																																				
S1	-10...120	0...250																																				
S2	0...50	40...140																																				
S3	0...250	30...480																																				
S4	-15...35	0...100																																				
S5	0...100	40...240																																				
S6	-20...80	40...90	✓																																			
S7	0...160	0...150																																				
	Accuracy temperature	±0.5°C @ 21°C [±0.9°F @ 70°F] @ measuring range setting S2 and S4																																				
	Long-term stability	±0.11°F p.a. @ 70°F [±0.06°C p.a. @ 21°C] [±32.1°F p.a. @ 69.8°F]																																				
	Time constant τ (63%) in the air duct	Typical 100 s @ 0 m/s																																				
<b>Safety Data</b>	Protection class IEC/EN	III, Protective Extra-Low Voltage (PELV)																																				
	Power source UL	Class 2 Supply																																				

**Technical data**

<b>Safety Data</b>	Degree of protection IEC/EN	IP65
	Degree of protection NEMA/UL	NEMA 4X
	Housing	UL Enclosure Type 4X
	EU Conformity	CE Marking
	Certification IEC/EN	IEC/EN 60730-1
	Quality Standard	ISO 9001
	UL 2043 Compliant	Suitable for use in air plenums per Section 300.22(C) of the NEC and Section 602 of the IMC
	Type of action	Type 1
	Rated impulse voltage supply	0.8 kV
	Pollution degree	3
	Ambient humidity	Max. 95% RH, non-condensing
	Ambient temperature	-30...120°F [-35...50°C]
	Fluid temperature	-30...160°F [-35...70°C]
	Housing surface temperature	max. 160°F [70°C]
	<b>Materials</b>	Housing
Cable gland		PA6, black

**Safety Notes**


This device has been designed for use in stationary heating, ventilation and air-conditioning systems and must not be used outside the specified field of application. Unauthorized modifications are prohibited. The product must not be used in relation with any equipment that in case of a failure may threaten humans, animals or assets.

Ensure all power is disconnected before installing. Do not connect to live/operating equipment.

Only authorized specialists may carry out installation. All applicable legal or institutional installation regulations must be complied with during installation.

The device contains electrical and electronic components and must not be disposed of as household refuse. All locally valid regulations and requirements must be observed.

**Remarks**
**General Remarks Concerning Sensors**

Due to self-heating with 2 wire passive sensors, the supply wire current affects the measurement accuracy. So the supply current should not be higher than the measuring current values specified in this data sheet.

**Remark: Occurring draft leads to a better carrying-off of dissipative power at the sensor. Thus temporally limited fluctuations might occur upon temperature measurement.**

Remarks

**Build-up of self-heating by electrical dissipative power**

Temperature sensors with electronic components always have a dissipative power which affects the temperature measurement of the ambient air. The dissipation in active temperature sensors shows a linear increase with rising operating voltage. The dissipative power should be taken into account when measuring temperature.

In case of a fixed operating voltage ( $\pm 0.2$  V), this is normally done by adding or reducing a constant offset value. As Belimo transducers work with a variable operating voltage, for reasons of production engineering only one operating voltage can be taken into consideration. Transducers 0...10 V / 4...20 mA have a standard setting at an operating voltage of DC 24 V. This means that at this voltage, the expected measuring error of the output signal will be the least. For other operating voltages, the offset error will be increased by a changing power loss of the sensor electronics.


If a readjustment directly at the active sensor should be necessary during later operation, this can be done with the following adjustment methods.

- For sensors with NFC or dongle with the corresponding Belimo app
- For sensors with a trimming potentiometer on the sensor board
- For bus sensors via bus interface with a corresponding software variable

Parts included

Description	Type
Mounting plate S housing	A-22D-A09
Mounting kit, with 6 mounting brackets	A-22D-A08
1/2" NPT conduit connector	



Wiring Diagram

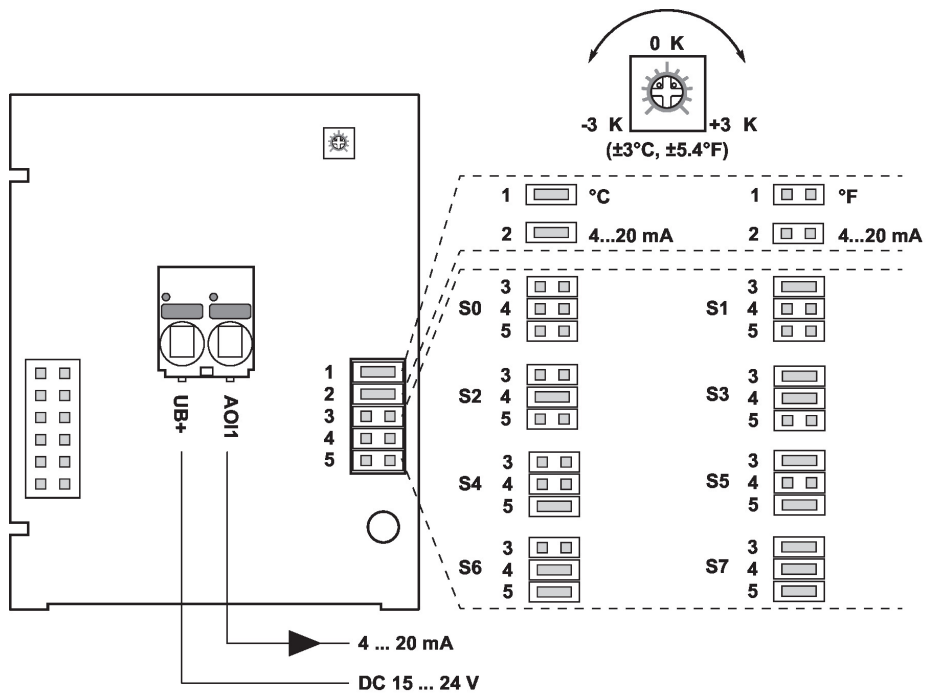

The following measuring ranges can be adjusted through the jumper settings:

Setting	Range [°C]	Range [°F]	Factory setting
S0	-50...50	-30...130	
S1	-10...120	0...250	
S2	0...50	40...140	
S3	0...250	30...480	
S4	-15...35	0...100	
S5	0...100	40...240	
S6	-20...80	40...90	✓
S7	0...160	0...150	

Dimensions

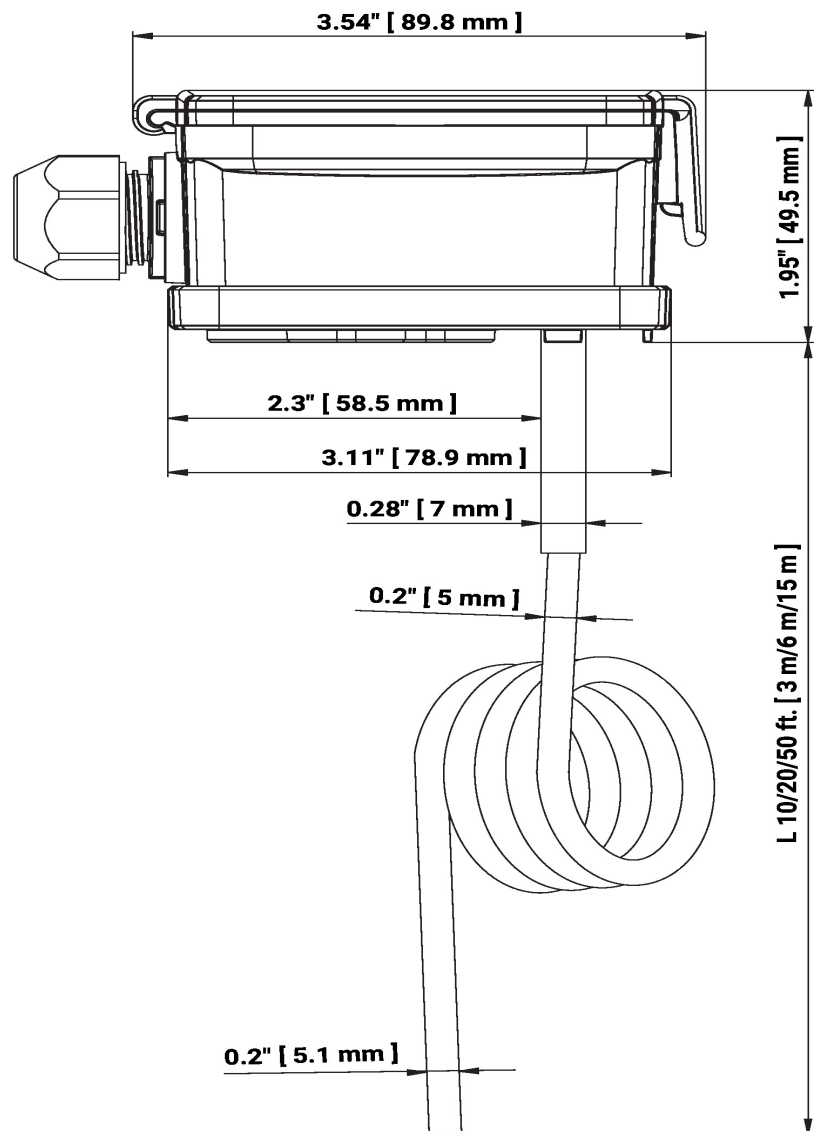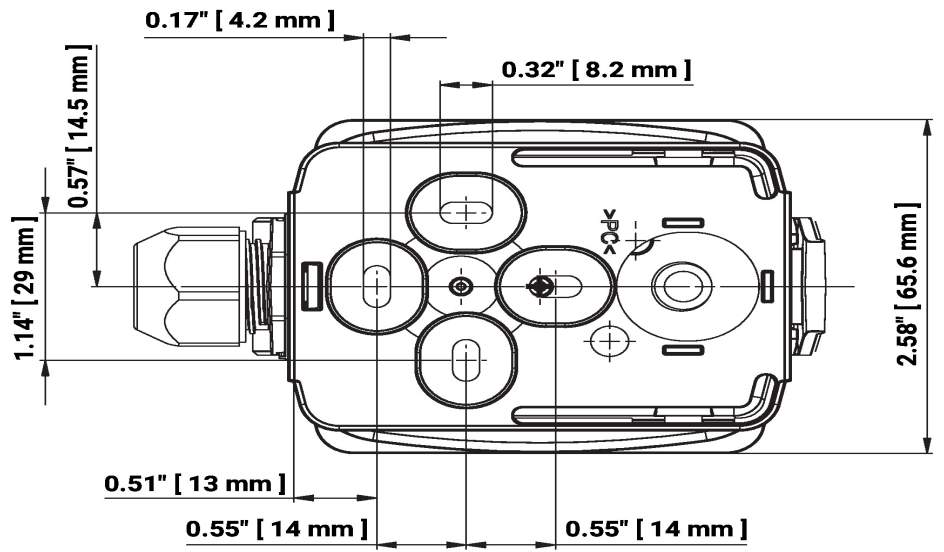

**Dimensions**

Type	Probe Length	Weight
22MT-544	10 ft [3 m]	0.49 lb [0.22 kg]
22MT-545	20 ft [6 m]	0.62 lb [0.28 kg]
22MT-548	50 ft [15 m]	0.62 lb [0.28 kg]

**Further documentation**

- Installation instructions