


Screw terminal blocks for DIN rails
 Polyamide **PA 6.8**
 Self-extinguishing **UL94V0**
GWIT775°C (EN 60695-2-13)
 Working temperature of **110°C**
 Metallic inserts in zinc plated steel
 Screws in zinc plated steel
 Accessories at pag. 30

Approvals



CEI EN 60947-1 / CEI EN 60947-7-1 / CEI EN 60947-7-2

T 105°C / UL 486 E

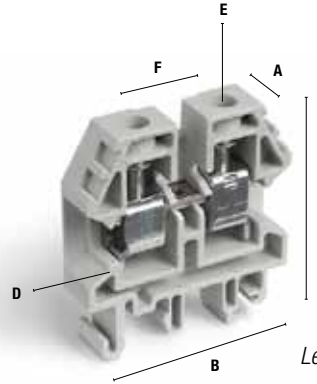

Legend for dimensions

Description	Part		Part		Part		Part		Part	
Screw terminal blocks grey colour (RAL 7035)	PL 2,5		PL 4		PL 6		PL 10		PL 16	
	2,5 mm ² - 24A - 750V		4 mm ² - 32A - 750V		6 mm ² - 41A - 750V		10 mm ² - 57A - 750V		16 mm ² - 76A - 750V	
UL File #E73420	12AWG - 25A - 600V		10AWG - 30A - 600V		8AWG - 42A - 600V		6AWG - 50A - 600V		4AWG - 65A - 600V	
A Pitch and thickness	6 mm		6,5 mm		8 mm		10 mm		12 mm	
B Width	40,5 mm		41,3 mm		41,3 mm		41,3 mm		50,3 mm	
C Height	43,5 mm		48,3 mm		48,5 mm		48,8 mm		53,3 mm	
Height with din rails	35x7,5	35x15	35x7,5	35x15	35x7,5	35x15	35x7,5	35x15	35x7,5	35x15
	45,3 mm	52,8 mm	50,3 mm	57,8 mm	50,3 mm	57,8 mm	50,3 mm	57,8 mm	55,5 mm	62,8 mm
D Ø Bush hole	3 x 4,1 mm		3,4 x 5 mm		4,5 x 5,5 mm		5,6 x 5,7 mm		6,6 x 7,3 mm	
E Screw	M 2,5		M 3		M 3,5		M 4		M 4	
F Chimneys interaxis	16 mm		19 mm		19 mm		19 mm		21 mm	

Description	Part		Part	
Screw terminal blocks grey colour (RAL 7035)	PL 35		PL 70	
	35 mm ² - 125A - 750V		70 mm ² - 192A - 750V	
UL File #E73420	2AWG - 90A - 600V		00AWG - 140A - 600V	
A Pitch and thickness	18 mm		22 mm	
B Width	58,3 mm		75 mm	
C Height	65,5 mm		81,7 mm	
Height with din rails	35x7,5	35x15	35x7,5	35x15
	67,1 mm	74,6 mm	82,9 mm	90,4 mm
D Ø Bush hole	10,5 x 9,3 mm		14,4 x 14 mm	
E Screw	M 6		M 8	
F Chimneys interaxis	26,8 mm		34 mm	