

P4 Value Series

P4 Value Dry Pressure

Range: 0.1 to 25" W.C.

0-5VDC/10VDC or 4-20 mA loop & 3-wire powered versions

LCD option & LED status indication

Remote & manual zero function

PATENTED DESIGN




DESCRIPTION

The P4 dry media pressure transmitter features fixed ranges optimized for building (zone) pressure, filter measurement, and static duct applications. Innovative static probe integrates with unit or can be mounted remotely for static pressure. PATENTED DESIGN

APPLICATIONS

- Building (zone) pressure
- Filter condition measurement
- Duct/static
- OEM HVAC
- Data Centers

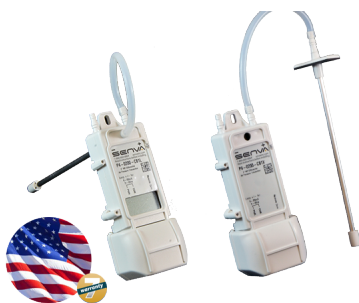

Probe transforms for duct or remote applications. Made in USA. 7yr warranty!



High density DIN mounting saves valuable panel space



Conduit ready

FEATURES

- Duct, filter, and room pressure with a single unit with RP-6 probe addition
- LCD option for set-up and reference
- Non-position sensitive for easy placement accuracy
- 0-5VDC/10VDC or 4-20 mA loop or 3-wire powered versions
- DIN mount flat or side to conserve panel space
- Conduit cover for 3/8" flex connectors...no extra parts required
- LED: Power heartbeat, auto-zero complete, 110% over pressure; facilitates locating sensor in ductwork

ORDERING

P4	-		-					
Fixed Range*		Output		Uni or Bi	Accuracy**	Display	Duct Probe	
0005 = 0-0.05 "w.c.	0025Pa = 0-25 Pa	A = 0-5VDC, 3-Wire		U = Uni-directional	1 = 1.00% of range	L = LCD	P = Duct Probe	
0010 = 0-0.10 "w.c.	0050Pa = 0-50 Pa	B = 0-10VDC, 3-Wire		B = Bi-directional	2 = 0.25% of range NIST	X = No Display	X = No Probe	
0025 = 0-0.25 "w.c.	0100Pa = 0-100 Pa	C = 4-20mA, 2-wire			5 = 0.50% of range NIST			
0050 = 0-0.50 "w.c.	0300Pa = 0-300 Pa	D = 4-20mA, 3-wire			N = 1.00% of range NIST			
0100 = 0-1.0 "w.c.	0500Pa = 0-500 Pa							
0150 = 0-1.5 "w.c.	1000Pa = 0-1000 Pa							
0250 = 0-2.5 "w.c.	1600Pa = 0-1600 Pa							
0300 = 0-3.0 "w.c.	2500Pa = 0-2500 Pa							
0500 = 0-5.0 "w.c.	3000Pa = 0-3000 Pa							
0750 = 0-7.5 "w.c.	5000Pa = 0-5000 Pa							
1000 = 0-10 "w.c.								
1500 = 0-15 "w.c.								
2500 = 0-25 "w.c.								
5000 = 0-50 "w.c.								

Example part number P4-0500-CU2LP is 4-20mA (2-wire), 0.25% accuracy, uni-directional 0-5" WC sensor with LCD display and Duct Probe

**Other Fixed Ranges Available Upon Request (mmwc, etc), Please Consult Factory*


***0.25% accuracies available on 0.5" w.c. and greater, 0.5% accuracy available on 0.1" w.c. and greater (or equivalent Pa ranges)*

Example part number P4-0500-CU2LP is 4-20mA (2-wire), 0.25% accuracy, uni-directional 0-5" WC sensor with LCD display and Duct Probe.

*Other Fixed Ranges Available Upon Request (mmwc, etc), Please Consult Factory

**0.25% accuracies available on 0.5"w.c. and greater, 0.5% accuracy available on 0.1"w.c. and greater (or equivalent Pa ranges)

DIMENSIONS

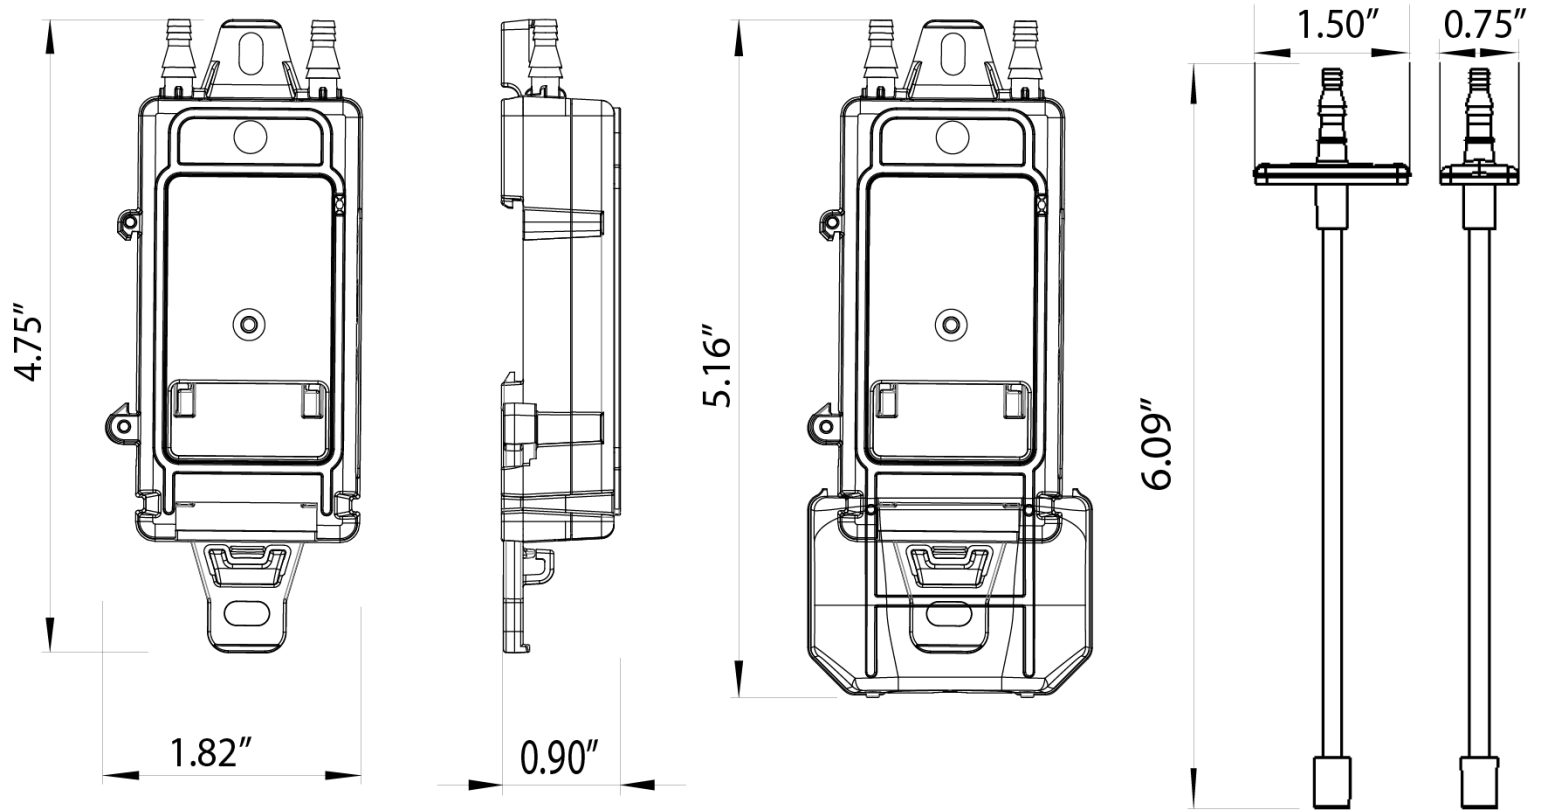

 **Warning:** The datasheet is designed for reference only. Refer to installation instructions that accompany the product and heed all safety instructions. Product improvement is a continuing process at Senva. Changes may occur to products without prior notice.

SPECIFICATIONS		
Power Supply		12-30VDC/24VAC(1), 30mA max
Output type	Outputs Available	4-20mA loop powered, 4-20 mA 3-wire, 0-5VDC, 0-10VDC
Fixed Ranges	Multiple Fixed Ranges (Inches of w.c. and Pascals)	0.05"w.c. up to 50"w.c. models 25 Pa up to 5000 Pa models
Operating Temperature	Operating range	-4 to 140F (-20 to 60°C)
	Compensated range	-4 to 140F (-20 to 60°C)
Media compatibility		Dry, oil-free air, N2
Sensor Type		MEMS silicon piezoresistive; precision calibrated
Sensor Performance	Accuracy 1.00%	±1.00% of range
	Accuracy 0.25%(2)	±0.25% of range; 7-point NIST calibrated
	Accuracy 0.50%(2)	±0.50% of range; 7-point NIST calibrated
	Zero Tolerance	Included in accuracy specification
	Span Tolerance (3)	±1.00%
	Zero Drift (1 year)	0.004"WC/year max. 0.4% for units >0.5"w.c.
	Auto-zero input	Push-button and contact closure
	Thermal Shift (Zero and Span)	0.02% FSO/°C (0.01%FSO/°F) measured from 22°C (72°F)
	Overpressure	up to 5" models: 41.5"w.c.; 10" models: 133"w.c.; 25" models: 332"w.c
	Max Static Line Pressure	up to 5" models: 41.5"w.c.; 10" models: 133"w.c.; 25" models: 332"w.c.
Response Rate	Burst Pressure	up to 5" models: 83"w.c.; 10" models: 166"w.c.; 25" models: 415"w.c.
	Position Sensitivity	Non-position sensitive
Agency	Compliance	CE, RoHS
Enclosure	Flammability	UL94 5VB
	Environmental	NEMA 1

(1) One side of transformer secondary is connected to signal common. Dedicated transformer is recommended.

(2) Accuracy includes non-linearity, hysteresis, and repeatability at 70°F.

(3) Span tolerance is ±1% ±0.005inWC for models less than 0.10inWC or equivalent pressure range.

(4) Full scale response time.

* Product improvement is a continual process at Senva and product features and specification may change without prior notice. Refer to instructions that accompany the product for installation and wiring.